


0610 DECISO

ACTIVE CHLORINE CLEANER FOR WALLS

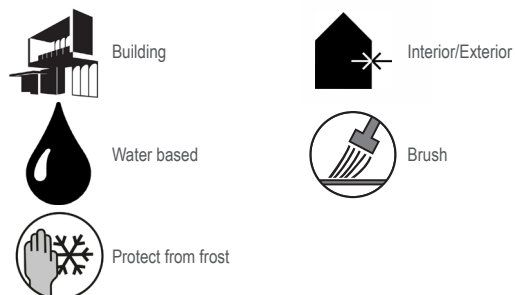

Description and Use

DECISO is used as a detergent solution for cleaning masonry surfaces showing deterioration due to various types of hard-to-remove stains and dirt, as well as aiding the mechanical removal of mould from walls. It can be applied on interior and exterior surfaces.

Application

Application method:

- brush
- special spray pack

Dilution:

ready-to-use

Application:

Apply DECISO using a brush, or spray with the special spray pack.

Let it react for 1-2 hours.

Depending on the state of deterioration, the cleaning treatment may be repeated, with the addition of mechanical brushing. Rinse with plenty of water to remove all cleaning residues.

Recoating:

After 8-10 hours.

Storage life

PROTECT FROM FROST. Store the packaged product at a temperature between +5°C and +35°C.

If stored in a cool, dry place, away from sources of heat and sheltered from sunlight, in its sealed original packaging, the product has a shelf life of 12 months. Check the product's shelf life by referring to the production batch number shown on the packaging. The batch number is made of eight numeric characters in which the first four digits identify the year and month of production. Once the product has expired, it must be disposed of in accordance with the current legislation.

Technical features

Colour	transparent
Specific weight	1.07 kg/l (± 0.02)
pH	12.0 ± 0.5
Yield	8-10 m ² /l
The data are measured at a temperature of 20°C.	

Warnings

- For professional use only.
- **Ingredients declaration according to Reg. (EC) 648/2004:** between 5-15% chlorine-based bleaching agents.
- Dispose of contents / container in accordance with national regulations.
- Always read the safety datasheet before use.
- Tool wash water and any product residues must not be released into the environment or discharged into the domestic sewage system. The recipient/product/wash water must be disposed of in accordance with national laws.
- Surface and ambient temperature must be above + 5 (41°F) and below 35°C (95°F).
- Do not use in combination with other products, harmful gases (chlorine) may form.
- Do not use on surfaces whose properties are unknown, test a small section beforehand to check cleaning.
- During use, ventilate the room well and use water to clean tools.
- The information provided on this technical datasheet is based on our technical and practical knowledge and experience. The technical data refer to the average characteristics of the basic product and are determined under controlled laboratory conditions. The variability of the raw materials available on the market and the tinting of the product can lead to slight deviations in the declared values, in the colour and in the aesthetic effects obtained. It is therefore necessary for the purchaser/user to personally verify, before application, the suitability of the product for the intended use, in particular when different batch numbers of the same material are used in the same work/site.

The above mentioned data are meant to facilitate our customers in the use of our products. IMPA is not responsible for applications of products carried out beyond its direct control. For further technical information about specific systems and/or special applications, please contact our TECHNICAL SERVICE at assistenza.tecnica@impa.it.